

AGFA PRIJEVOD ENGLSKI – HRVATSKI

ENG

3. Agfa Mini Printer 2*3 Black

<https://drive.google.com/drive/folders/1VNHuzsMmHZylQGw2ZESaAKhNYvJVm8JR>

https://drive.google.com/drive/folders/1qz56pdoF9Sntr9v3js5Jv_H29i7DKo00



AGFAPHOTO USER GUIDE REALPIX MINI P

Smartphone App Installation

1. ANDROID

- 1) Go to **GOOGLE Play Store** in your smartphone.
- 2) Search “**Agfaphoto Realipix**“.
- 3) Install “**Agfaphoto Realipix**“ into your smartphone.

2. APPLE Device

- 1) Go to **APP STORE** in your **IPHONE, IPOD TOUCH** or **IPAD**.
- 2) Search “**Agfaphoto Realipix**“.
- 3) Install “**Agfaphoto Realipix**“ application into your device.

BLUETOOTH Connection

- 1) Turn on **BLUETOOTH** in your smartphone.
- 2) Turn on printer.
- 3) Go to **BLUETOOTH** setting in your smartphone and you can find “**Agfaphoto – XXX**“ (“**XXXX**“ are 4 digits combination of numbers and letters.)
- 4) Select it for connection. Searching → Connecting → Printer Found

Before Start


- 1) This Printer has built-in battery. Charge the printer before using it.
- 2) How to Change Cartridge.

IN/OUT

Pull out or Push the cartridge with this handle.

IN/OUT

Follow the arrow to insert the cartridge.

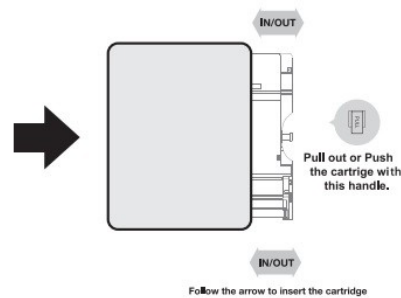

Printing in the App

1. "Agfaphoto Realipix" app launch → 2. "Gallery" to load your device's photos. → 3. Choose Photo → 4. Select Print Number → 5. Select Printer Icon
- *Select SNS if you want to print the photo from it.



Note

- Photo Paper will go in and out 4 times (YMCO, Yellow, Magenta, Cyan, Overcoating). Do not touch the paper during printing process for best image quality.
- Do not pull paper out by force during printing.
- Do not place an object in front of the paper exit slot.
- Use the latest application for best print quality. Check the latest app version from GOOGLE Play Store and APPLE APP STORE.
- Printer has built-in battery. Charge the printer before using.
- Handle with care during charging to prevent electric shock.
- Do not disassemble or deform.
- Avoid too high or low temperature or humidity.
- The higher resolution the image has, the higher quality the printed photo has. Recommended image size is 1280*2448 pixel.
- Operating Temperature: 0-40°C.

Troubleshooting

Symptom	Cause / Solution
Paper Jam	Power off and Power On again. Paper will be automatically ejected. If not, please contact customer service.
Image quality is not good.	Print quality could be less if your photo source has low resolution. Over 1280 x 2448 pixel is recommended for best image quality.
Printer is not responding.	Press Reset button with sharp tool like pin.

Power and Active Status

-  Power ON: White / Power OFF (2 Sec): Off / Printing: White Flickering
F.W Upgrade: Pink Flickering / No Cartridge, Error: Red Flickering
Waiting, Cooling: White
- **Charge** Charging: Red / Charging Complete: Green
-  Connecting: Green Blink / Bluetooth Complete: Green

FCC (Federal Communications Commission) // CE

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and***
- (2) This device must accept interference received, including interference that may cause undesired operation.***

Notice of compliance for the European Union

Products bearing the CE mark comply with the applicable European directives and associated harmonised European standards.

Caution: Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment. This appliance and its antenna must not be co-located or operation in conjunction with any other antenna or transmitter.

A minimum separation distance of 20 cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirements.

WARRANTY - 1 year limited warranty

Compatible cartridge

AGFAPHOTO

After sales service

Email: aftersaleservice@gtcompny.fr

Phone: 0033 1 85 49 10 26

Made in Korea

@ Prinics Co., LTD.

CRO

3. Agfa Mini Printer 2*3 (crni)

<https://drive.google.com/drive/folders/1VNHuzsMmHZylQGw2ZESaAKhNYvJVm8JR>
https://drive.google.com/drive/folders/1qz56pdoF9Snr9v3js5Jv_H29i7DKo0O



AGFAPHOTO KORISNIČKI PRIRUČNIK REALPIX MINI P

Instalacija aplikacije za pametni telefon

1. ANDROID

- 1) Idite na GOOGLE Play Store na svom pametnom telefonu.
- 2) Pretražite "Agfaphoto Realipix".
- 3) Instalirajte "Agfaphoto Realipix" na svoj pametni telefon.

2. APPLE uređaj

- 1) Idite na APP STORE na vašem IPHONE-u, IPOD TOUCH-u ili IPAD-u.
- 2) Pretražite "Agfaphoto Realipix".
- 3) Instalirajte aplikaciju "Agfaphoto Realipix" na svoj uređaj.

BLUETOOTH veza

- 1) Uključite BLUETOOTH na svom pametnom telefonu.
- 2) Uključite printer.
- 3) Idite na postavku BLUETOOTH na pametnom telefonu gdje možete pronaći "Agfaphoto – XXX" ("XXXX" označava kombinaciju brojeva i slova od 4 znamenke)
- 4) Odaberite ga za povezivanje. Traženje → Povezivanje → Printer pronađen

Prije početka


- 1) Ovaj printer ima ugrađenu bateriju. Napunite printer prije upotrebe.
- 2) Kako promijeniti kasetu za toner.

(IN/OUT) ULAZ / IZLAZ

Izvučite ili gurnite kasetu ovom ručkom.

(IN/OUT) ULAZ / IZLAZ

Slijedite strelicu za umetanje kasete.

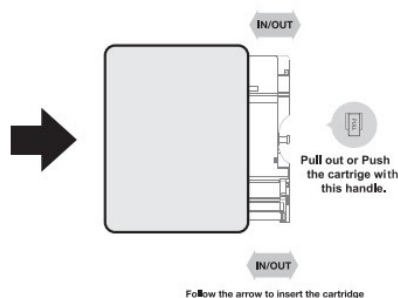

Ispis u aplikaciji

1. Pokretanje aplikacije “Agfaphoto Realipix“ → 2. “Galerija“ za učitavanje fotografija vašeg uređaja. → 3. Odaberite fotografiju → 4. Odaberite broj ispisa → 5. Odaberite ikonu pisača / printera

* Odaberite SNS ako želite ispisati fotografiju s njega.

Napomena

- Papir za print ulazi i izlazi četiri puta Photo (YMCO, Yellow, Magenta, Cyan, Overcoating). Ne dodirujte papir tijekom postupka ispisa radi dobivanja najbolje moguće kvalitete slike.
- Nemojte izvlačiti papir na silu tijekom ispisa.
- Ne postavljajte predmete ispred izlaza za papir.
- Koristite najnoviju aplikaciju za najbolju kvalitetu ispisa. Provjerite najnoviju verziju aplikacije iz GOOGLE Play trgovine i APPLE APP STORE-a.
- Printer / pisač ima ugrađenu bateriju. Prije uporabe napunite printer.
- Pažljivo rukujte tijekom punjenja kako biste spriječili strujni udar.
- Nemojte rastavljati printer niti ga deformirati..
- Izbjegavajte previsoke ili niske temperature ili vlagu.
- Što je slika veće rezolucije, tiskana fotografija ima veću kvalitetu. Preporučena veličina slike je 1280*2448 piksela.
- Radna temperatura: 0-40°C.

Rješavanje problema

Simptom	Uzrok / Rješenje
Zaglavljivanje papira.	Isključite i ponovno uključite. Papir će se automatski izbaciti. Ako ne, obratite se korisničkoj službi.
Kvaliteta slike nije dobra.	Kvaliteta ispisa mogla bi biti manja ako vaš izvor fotografija ima nisku razlučivost. Za najbolju kvalitetu slike preporučuje se preko 1280 x 2448 piksela.
Printer / pisač ne reagira.	Pritisnite gumb za poništavanje oštrim alatom poput igle.

Snaga i aktivni status



Uključeno napajanje: bijelo / isključeno (2 sek): isključeno / ispis: bijelo treperenje.
F.W nadogradnja: ružičasto treperenje / nema kasete, pogreška: crveno treperenje.
Čekanje, hlađenje: bijelo.



Punjenje: crveno / punjenje završilo: zeleno.



Povezivanje: zeleno treptanje / Bluetooth. Dovođeno: zeleno.

FCC (Savezna komisija za komunikacije) // CE

Ovaj je uređaj sukladan s 15. dijelom FCC pravila.

Rad je podložan sljedećim uvjetima:

(1) Ovaj uređaj ne smije stvarati štetne smetnje i

(2) Ovaj uređaj mora prihvatiti primljene smetnje, uključujući smetnje koje mogu prouzročiti neželjeni rad.

Obavijest o sukladnosti za Europsku uniju

Proizvodi koji nose CE oznaku usklađeni su s važećim europskim direktivama i povezanim usklađenim europskim standardima.

Oprez: Bilo kakve promjene ili preinake na opremi koje strana koja je odgovorna za usklađenost nije izričito odobrila, mogu lišiti prava korisnika na upravljanje opremom. Ovaj uređaj i njegova antena ne smiju se nalaziti zajedno ili raditi zajedno s bilo kojom drugom antenom ili odašiljačem. Između antene i osobe koja rukuje ovim uređajem mora se održavati minimalna udaljenost odvajanja od 20 cm kako bi se udovoljilo zahtjevima RF izloženosti.

JAMSTVO – jedna godina ograničenog jamstva

Kompatibilna kasete za toner

AGFAPHOTO

Servis nakon prodaje

Email: aftersaleservice@gtcompny.fr

Phone: 0033 1 85 49 10 26

Proizvedeno u Koreji

@ Prinics Co., LTD.